

Commander System Assembly Form

Page 1 of 2

Customer: _____ Date: _____ Order Ref. #: _____

Quantity: _____ Project: _____

Output Voltage: **-48V CMDRS-48 Shelf**

Note: Unless specified, all Commander Shelves are -48 VDC. The chassis is isolated from DC. A chassis ground stud is provided on rear of shelf should installer wish to ground shelf chassis to DC Ground.



Rectifiers: Indicate quantity and type below (7 maximum)

C2R-1000 (48V) _____

C2R-2000 (48/24V) _____

C2RX-2048 (48V) _____

Rectifier Qty: _____

Blank Panels (for unused rectifier bays): _____


NEWMAF
PoweringTheNetwork.com

F-820-006
Rev. C

Commander System Assembly Form

Distribution Circuit Breaker Configuration

Page 2 of 2

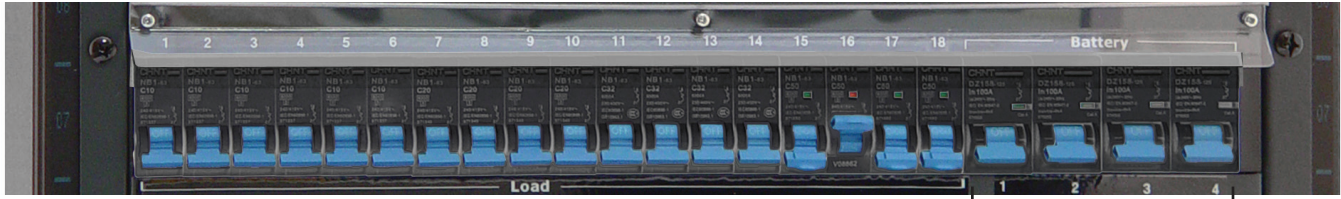

Available Breaker Ratings: 6, 10, 16, 20, 25, 32, 40, 50, & 63 *Amps
Four 100 Amp Battery Breakers Installed Standard

Position	Amperage	
1	_____	Pos. # 1-4
2	_____	
3	_____	
4	_____	
5	_____	Pos. # 5-18
6	_____	
7	_____	
8	_____	
9	_____	
10	_____	
11	_____	
12	_____	
13	_____	
14	_____	
15	_____	
16	_____	
17	_____	
18	_____	

***Note:** 63 Amp breakers cannot be installed in positions 5-18

Special Programming/Modifications:

A) Assign name to Auxiliary Alarm Inputs (4x)

- 1) _____
- 2) _____
- 3) _____
- 4) _____

B) Install Ambient Temperature Sensor: _____

Default LVD Settings

C) Modify LVD activation settings to: _____ Disconnect, _____ Re-Connect

Voltage	Disconnect	Re-Connect
48V	42.0	49.0

D) Negative Ground Special Order: _____ (Allow 12 weeks lead time)

System Configuration Specified By: _____ Date: _____

Note: If you make changes after your system is configured to your specifications, a re-work fee may apply.