

Centurion III System Assembly Form Page 1 of 2

Customer: _____ Date: _____ Order Ref. #: _____

Quantity: _____ Project: _____

Chassis Grounding Note: The default chassis ground configuration on the 48 volt system is DC positive (+). If your application requires the DC system ground to be "floating" or isolated from the chassis ground, we can perform this modification to the unit prior to shipment. If you desire this configuration, check the box below.

Modify DC Chassis ground to Isolated: ☐



Rectifier Bays

DC-DC Converter Bays

48V Rectifiers: Indicate quantity and type below (2 maximum)

RM2048HE (48V, 2000W) _____

Quantity of Blank Panels (for unused rectifier bays): _____

DC-DC 48V Input Converter Modules: Indicate quantity per voltage below (2 maximum)

C3C-12-40 (12V): _____

C3C-24-25 (24V): _____


Quantity of Blank Panels (for unused DC converter bays): _____

Centurion III Assembly Form

Distribution Circuit Breaker Configuration

Page 2 of 2

Two 63 Amp Battery Breakers Installed

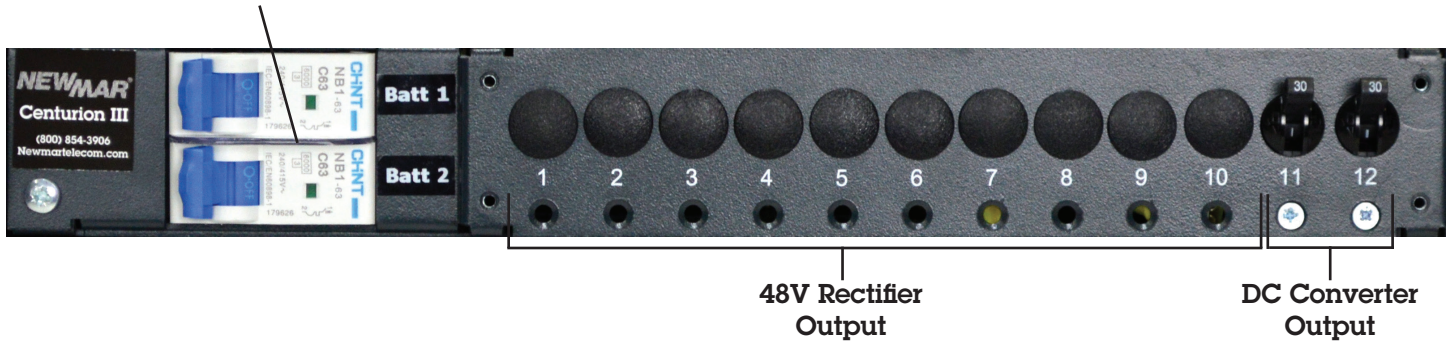

Available Breaker Ratings:
6, 10, 15, 20, 25 & 30 Amps

Position	Amperage	
1		
2		
3		
4		
5		
6		
7		
8		
9		
10		
11	30	
12	30	

48VDC: Summed value of breaker ratings
in positions 1-10 not to exceed 100 amps

12/24VDC: 30 amp maximum breaker each position

Special Programming/Modifications (additional fee applies):

- A) Install & Activate Ambient Temperature Sensor (TS2): ____ (P/N: 435-0118-0)
- B) 23" Rack Mount Brackets: ____ (P/N: 435-2023-0)

System Configuration Specified By: _____ Date: _____

Note: If you make changes after your system is configured to your specifications, a re-work fee may apply.