

PHASE THREE SERIES BATTERY CHARGER

Phase Three “smart” battery charging technology is available in a wide range of power levels, allowing you to select the right size, features, and flexibility required for your deployment. Ideal for virtually any application, these chargers provide quick recharge of auxiliary batteries in vehicles parked in the station house or power continuous loads and maintain peak charge in large battery systems in remote communication sites, industrial generators, and marine applications. These chargers interact with batteries to go through the optimum three stage charge process, providing the fast recovery and ideal conditioning, maximizing battery performance, and extending battery life.




KEY FEATURES

- “Smart” circuitry provides three stage charging: bulk, absorption, float
- Wide model range covers battery system ratings from 14–950 amp-hours
- Gel-Cell/Flooded Lead-acid/AGM battery type switch selects optimum charge/float voltages
- Multiple isolated output banks (ammeter indicates total output current) and optional sensor adjusts output voltage based on battery temperature (except PT-7)
- Current limiting-prevents damage from overloading
- Charger status clearly displayed with L.E.D. and/or audible indicators or optional remote panel
- Use as a power supply; can power loads without a battery in line
- Rugged stainless steel case with a durable white powder coat finish with drip shield and polyurethane coated internal circuitry
- Protection for all models: input/output fuses, current limiting, thermal protection, forced air cooling, drip shield
- Numerous safety and EMC compliances
- Two-year parts and labor warranty

PRODUCT MODELS

12 Volt	24 Volt	32 Volt
PT-14W	PT-24-8W	PT-32-25W
PT-25W	PT-24-13W	
PT-40	PT-24-20	
PT-80	PT-24-45U	
	PT-24-60W	
	PT-24-95U	

TYPICAL CHARGE CURVE

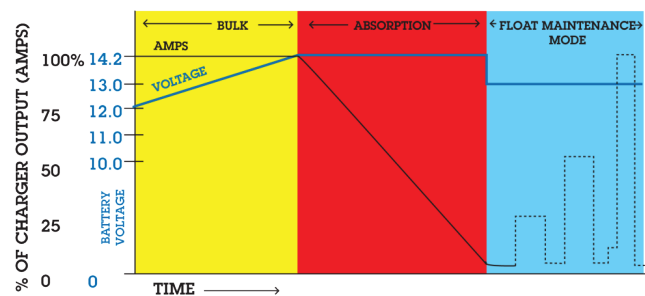

OPTIONAL ACCESSORIES




DC Energy Monitor (DCE)



Temperature Compensation Sensor (TCS-12/24)

Temperature compensation: -5 mV per cell per °C.
Sensor supplied with 25' cable and plug-in connector.



Remote Indicator Panel (RP)

LED's indicate charger output stage. Button allows manual reinitialization of three stage charge cycle. 25' cable and plug-in connector included.
Panel dimensions: 3" H x 4.75" W

PHASE THREE SERIES BATTERY CHARGER

ELECTRICAL SPECIFICATIONS

	PT-7	PT-14W	PT-25W	PT-40U	PT-80	PT-24-8W	PT-24-13W	PT-24-20U	PT-24-45W	PT-24-60W	PT-24-95U	PT-32-25W
Input VAC (50-60 Hz)	88-132 or 176-264	85-264	88-132 or 176-264	90-264	90-264	85-264	88-132 or 176-264	90-264	90-264	207-253	90-264	104-126
Input Amps @ Full Load												
@ 115 VAC	2	2.8	6.5	6.8	12	2.8	6.5	6.8	12	N/A	26	15
@ 230 VAC	1	1.4	4	3.4	7	1.4	4	3.4	7	13	14	N/A
P.F. Rating	>0.65	0.93 @ 230 V 0.98 @ 115 V	0.7	0.95 @ 230 V 0.98 @ 115 V	0.95 @ 230 V 0.98 @ 115 V	0.93 @ 230 V 0.98 @ 115 V	0.7	0.95 @ 230 V 0.98 @ 115 V	0.95 @ 230 V 0.98 @ 115 V	0.7	0.95 @ 230 V 0.98 @ 115 V	0.7
Max Output Amps	7	14	25	40	80	8	13	20	45	60	95	25
Output Banks	2	3	3	3	3	3	3	3	3	3	3	3
Battery Capacity (amp-hours)	14-70	28-140	50-250	80-400	160-800	16-80	26-130	40-200	90-450	120-600	180-950	50-250
Operating Temperature Rating Reference	T-1	T-2	T-4	T-5	T-7	T-2	T-3	T-5	T-8	T-6	T-8	T-6
Case Size Reference	A-1	A-2	A-2	A-3	A-5	A-2	A-2	A-3	A-5	A-6	A-6	A-4
Weight (lb/kg)	3.2/1.5	8/4	8.2/4	11/5	15.2/7	8/4	8.2/4	11/5	12.2/6	24.1/11	24.5/11	12.2/6
Optional Temperature Sensor Model	N/A	TCS-12/24	TCS-12/24	TCS-12/24	TCS-12/24	TCS-12/24	TCS-12/24	TCS-12/24	TCS-12/24	TP	TCS-12/24	TP
Remote Panel Model	N/A	RP	RP	RP	RP	RP	RP	RP	RP	N/A	RP	N/A
Equalize Option	No	Yes	Yes	No	Yes	Yes	Yes	No	Yes	No	Yes	No
Output Indicator Reference	M-1	M-3	M-3	M-3	M-3	M-3	M-3	M-3	M-3	M-2	M-3	M-2
Compliance References	CG, CE	CG, CE	CG	CG, CE	CG, CE	CG, CE	CG	CG, CE	EN, CE	EN, CE	EN, CE	EN, CE

Nominal Output Voltages at Gel/Flooded Switch Settings

Without Temperature Compensation option installed or at 22.2°C (72°F) with Temperature Compensation option installed.

	12 Volt Models		24 Volt Models		32 Volt Models	
	Charge @ 50% load	Charge @ 0.5 A load	Charge @ 50% load	Charge @ 0.5 A load	Charge @ 50% load	Charge @ 0.5 A load
Gel-Cell	14.0 VDC	13.6 VDC	28.0 VDC	27.2 VDC	37.3 VDC	36.2 VDC
Flooded/AGM	14.2 VDC	13.4 VDC	28.4 VDC	26.8 VDC	37.8 VDC	35.7 VDC

Compliance References

Numerous other Safety and EMC compliances may also apply. Contact factory if further compliance information is required.

	Description
CG	USCG CFR 183.410 (Ignition protected)
EN	EN 60335-1, EN 60335-2-29
CE	Carries the CE Mark

Case Size

	Dimensions (H x W x D)
A-1	10.5 x 5.0 x 2.8 in (267 x 127 x 71 mm)
A-2	12.5 x 7.7 x 4.3 in (318 x 196 x 109 mm)
A-3	13.85 x 9.5 x 4.8 in (352 x 241 x 122 mm) ¹
A-4	13.8 x 9.8 x 5.0 in (350 x 249 x 127 mm) ²
A-5	14.8 x 9.6 x 5.6 in (376 x 244 x 142 mm) ³
A-6	17.5 x 12.0 x 7.2 in (445 x 305 x 183 mm) ⁴

With dripshield installed:

¹Add .75" (19 mm) to height and 1.35" (34 mm) to depth

²Add 1.27" (32 mm) to height and 1.1" (28 mm) to depth

³Add 1" (25.4 mm) to height and .5" (12.7 mm) to depth

⁴Add 2" (50.8 mm) to height and 1" (25.4 mm) to depth

Temperature Ratings References

	Description
T-1	-10-45°C; derate linearly from 100% @ 0°C to 80% @ -10°C
T-2	-10-60°C; derate linearly from 100% @ 40°C to 60% @ 60°C
T-3	-10-60°C; derate linearly from 100% @ 50°C to 60% @ 60°C
T-4	-10-60°C; derate linearly from 100% @ 40°C to 60% @ 60°C
T-5	-20-60°C; derate linearly from 100% @ 50°C to 60% @ 60°C
T-6	-20-50°C; full output
T-7	-20-70°C; derate linearly from 100% @ 45°C to 50% @ 70°C
T-8	-20-70°C; derate linearly from 100% @ 50°C to 50% @ 70°C

Output Indicator References

	Description
M-1	Total output ammeter
M-2	Charge/Float L.E.D.
M-3	Total output ammeter and charger status L.E.D.'s/alarms